

LED STRIP

PRODUCT CATALOGUE **1**

SINCE 2009

LIFE ENRICH DIODES



SHENZHEN EVERLUSTER LIGHTING CO.,LTD


Address: 3F Building C,A bao Baihuadong Logistics park,
guangming office,Guangming new district,
Shenzhen,Guangdong,China.

Tel: +86(755)-27355535

Fax: +86(755)-27355302


URL: www.everluster.com

Email: sale@everluster.com

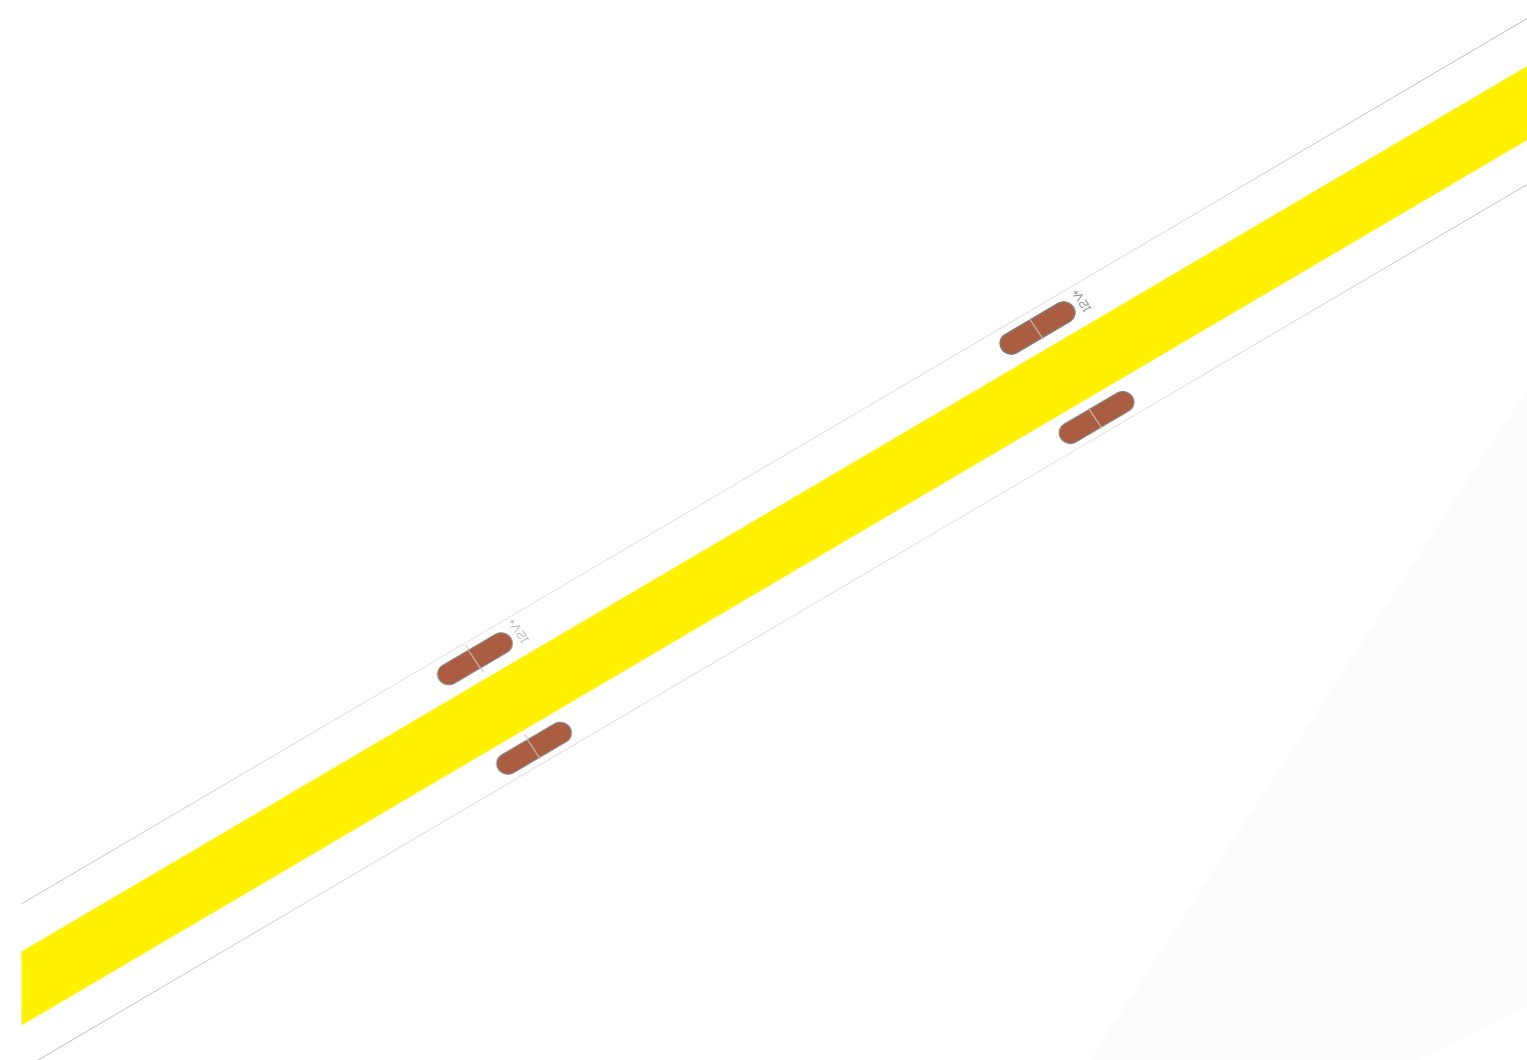

SHENZHEN EVERLUSTER LIGHTING CO.,LTD


ABOUT US



1300m² factory



58 workers



6 production lines



Capacity

LED strips: 300,000 meters/month
LED linear light: 30,000 meters/month



PARTNERS



COMMERCIAL NETWORK




Our Workshop



LED Strip Naming Rules


Model description (for example)

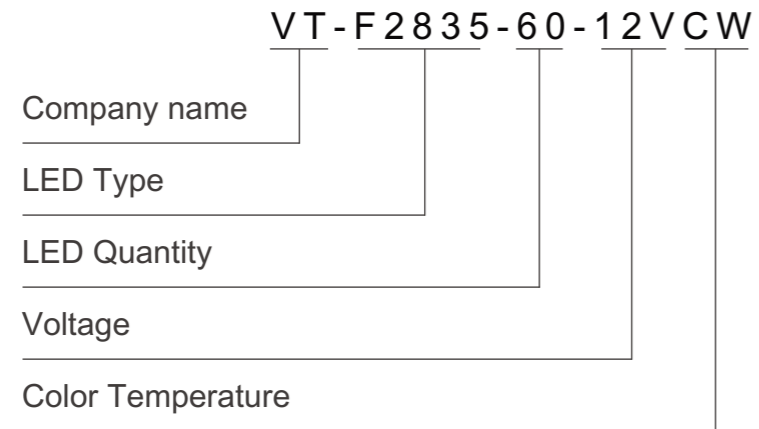

F2835 / FOB	Flexible strip / FOB series strip
CW/ NW/ WW	Different color temperature
DW	Double color
RGB	RGB LED
RGBW	RGB + Different color temperature

LED linear light Naming Rules

Model description (for example)

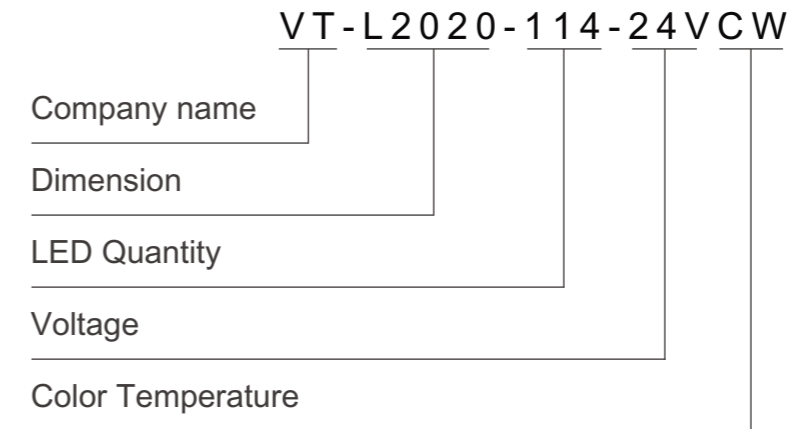

L2020 / N0606	Linear light / Neon Tube
CW/ NW / WW	Different color temperature
DW	Double color
RGB	RGB LED
RGBW	RGB + Different color temperature



- 01 LED COB strip
- 02 LED 0603 strip
- 03 LED 2110 strip
- 04 LED 2216 dual white strip
- 06 LED 3527 dual white strip
- 07 LED 3014 side view strip
- 09 LED 4014 white strip
- 10 LED 5050 dual white strip
- 15 LED 2835 strip
- 18 LED 3528 strip
- 21 LED 5630 strip
- 22 LED strip accessories profiles
- 24 LED power connector

FOB Series

Flexible COB Strip

New 576/504/420/378LEDs/M

NEWEST

White	Indoor	180°	24V DC	12V DC
80 CRI	90 CRI	6mm W	8mm W	10mm W

Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B



Parameters	576Chips/M	504Chips/M	420Chips/M	378LEDs/M
Dimension	5000*10*2.2MM	5000*10*2.2MM	5000*8*2.2MM	5000*6*2.2MM
Cuttable/LEDS	27.78mm 24V	18mm 12V 41.7mm 24V	35.7mm 12V 55.5mm 24V	23.5mm 12V 55.5mm 24V
Power	18W/M	14W/M	10W/M	7W/M
Lumens	1800LM/M	1400LM/M	1100LM/M	700LM/M
Voltage	24V	12V/24V	12V/24V	12V/24V
CRI	>80 >90	>80 >90	>80 >90	>80 >90
FPC Width	10MM	10MM	8MM	6MM
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	1800	1400	1100	700
4000-4500K	1700	1300	1000	600
2800-3200K	1600	1200	900	500
2600-2800K				
2400-2600K	1550	1150	850	450
2200-2400K				

0603 Series

0603 LED STRIP

Dotless 280/M

NEWEST

White	Indoor	180°	24V DC	12V DC	
90 CRI	95 CRI	3mm W	6mm W	8mm W	10mm W

Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B



Parameters	280LEDs/M
Dimension	5000*8*1MM
Cuttable/LEDS	25mm/7LEDS
Power	15W/M
Lumens	1650LM/M
Voltage	24V
Current	0.63A/M
FPC Width	8MM
IP Grade	IP20/65/67/68A

CCT	CRI	Efficiency LM/M
6000-6500K	90-95	1650
4000-4500K	>90	1600
2800-3200K	>90	1500
2600-2800K	>90	
2400-2600K	>90	1450
2200-2400K	>90	

2110 Series

2110White

New 600LEDs/M

600LEDs/M

White	Indoor	120°	24V DC
90 CRI	95 CRI	10mm W	



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	600LEDs/M
Dimension	5000*10*1.3MM
Cutttable/LEDS	10mm/6LEDs
Power	19.2W/M
Lumens	1680LM/M
Voltage	24V
Current	0.8A/M
FPC Width	10MM
IP Grade	IP20/65/67/68

CCT	CRI	Efficiency LM/M
6000-6500K	>90	1680
4000-4500K	>90	1680
2800-3200K	>90	1680
2600-2800K	>90	
2400-2600K	>90	1440
2200-2400K	>90	

2216 Series

2216 CCT Dual white

Daul 280/240LEDs/M

Daul White

White	Indoor	120°	24V DC	12V DC
90 CRI	95 CRI	10mm W		



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	280LEDs/M	240LEDs/M
Dimension	5000*10*1MM	5000*10*1MM
Cutttable/LEDS	50mm/14LEDs	50mm/12LEDs
Power	19.2W/M	19.2W/M
Lumens	1960LM/M	1680LM/M
Voltage	24V	24V
Current	0.8A/M	0.8A/M
FPC Width	10MM	10MM
IP Grade	IP20/65/67/68A	IP20/65/67/68A

CCT	CRI	Efficiency LM/M	Efficiency LM/M
6000-6500K	90-95	1960	1680
4000-4500K	>90	1960	1680
2800-3200K	>90	1960	1680
2600-2800K	>90		
2400-2600K	>90	1680	1440
2200-2400K	>90		

2216 Series

2216 White

280/240/120/60LEDs/M

White	Indoor	120°	24V DC	12V DC
90 CRI	95 CRI	10mm W	8mm W	5mm W
				3.5mm W



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	280LEDs/M	240LEDs/M	120LEDs/M Super narrow	60LEDs/M Super narrow
Dimension	5000*10*1MM	5000*10*1MM	5000*8*1MM	5000*8*1MM
Cuttable/LEDS	25mm/7LEDS	25mm/6LEDS	50mm/6LEDS/24V 25mm/3LEDS/12V	100mm/6LEDS/24V 50mm/3LEDS/12V
Power	19.2W/M	19.2W/M	9.6W/M	4.8W/M
Lumens	1960LM/M	1680LM/M	840LM/M	420LM/M
Voltage	24V	24V	24/12V	24/12V
Current	0.8A/M	0.8A/M	0.4A/M/24V 0.8A/M/12V	0.2A/M/24V 0.4A/M/12V
FPC Width	10mm	10mm	8/5/3.5mm	8/5/3.5mm
IP Grade	IP20/65/67/68A	IP20/65/67/68A	IP20/65/67/68A	IP20/65/67/68A

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	90-95	1960	1680	840	420
4000-4500K	>90	1960	1680	840	420
2800-3200K	>90	1960	1680	840	420
2600-2800K	>90				
2400-2600K	>90	1680	1440	720	360
2200-2400K	>90				

3527 Series

3527 Dual white

120/60LEDs/M

White	Indoor	120°	24V DC	12V DC
80 CRI	90 CRI	95 CRI	10mm W	

One led with double color



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	120LEDs/M	60LEDs/M
Dimension	5000*10*2MM	5000*10*2MM
Cuttable/LEDS	50mm/6LEDS	100mm/6LEDS/24V 50mm/3LEDS/12V
Power	19.2W/M	9.6W/M
Lumens	1800LM/M	900LM/M
Voltage	24V	24/12V
Current	0.8A/M	0.4A/M/24V 0.8A/M/12V
FPC Width	10mm	10mm
IP Grade	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1800	900
4000-4500K	>80	1800	900
2800-3200K	>80	1800	900
2600-2800K	>80		
2400-2600K	>80	1560	780
2200-2400K	>80		

3014 Series

3014 Side View

120/60LEDs/M

White	Indoor	120°	24V DC	12V DC
80 CRI	90 CRI	95 CRI	8mm W	

Side View



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	120LEDs/M	60LEDs/M
Dimension	5000*10*1.6MM	5000*10*1.6MM
Cuttable/LEDS	50mm/6LEDs/24V	100mm/6LEDs/24V
	25mm/3LEDs/12V	50mm/3LEDs/12V
Power	14.4W/M	7.2W/M
Lumens	1320LM/M	660LM/M
Voltage	24/12V	24/12V
Current	0.6A/M/24V	0.3A/M/24V
	1.2A/M/12V	0.6A/M/12V
FPC Width	10/8mm	10/8mm
IP Grade	IP20	IP20

CCT	CRI	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1320	600
4000-4500K	>80	1320	600
2800-3200K	>80	1320	600
2600-2800K	>80		
2400-2600K	>80	1080	540
2200-2400K	>80		

3014 Series

3014 White

240/204/180/120LEDs/M

White	Indoor	120°	24V DC	12V DC
80 CRI	90 CRI	95 CRI	8mm W	10mm W

For linear light



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	240LEDs/M	204LEDs/M	180LEDs/M	120LEDs/M
Dimension	5000*10*1MM	5000*10*1MM	5000*10*1MM	5000*8*1MM
Cuttable/LEDS	50mm/6LEDs	50mm/6LEDs/24V	50mm/6LEDs/24V	50mm/6LEDs/24V
				25mm/3LEDs/12V
Power	19.2W/M	20.4W/M	19.6W/M	14.4W/M
Lumens	1760LM/M	1870LM/M	1800LM/M	1320LM/M
Voltage	24V	24V	24V	24/12V
Current	0.8A/M	0.85A/M	0.82A/M	0.6A/M/24V
				1.2A/M/12V
FPC Width	10mm	10mm	10mm	8mm
IP Grade	IP20	IP20	IP20	IP20

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1760	1870	1800	1320
4000-4500K	>80	1760	1870	1800	1320
2800-3200K	>80	1760	1870	1800	1320
2600-2800K	>80				
2400-2600K	>80	1600	1700	1636	1200
2200-2400K	>80				

4014 Series

4014 White

126/182/210LEDs/M

White Indoor 120° 24V DC 12mm W

80 CRI 90 CRI



Available

IP20 IP65A IP65B IP67A

IP67B IP67C IP68A IP68B

Parameters	126LEDs/M	182LEDs/M	210LEDs/M
Dimension	5000*12*2.8MM	5000*12*2.8MM	5000*12*2.8MM
Cuttable/LEDS	55.55mm/7LEDS	38.46mm/7LEDS	33.61mm/7LEDS
Power	16W/M	24W/M	24W/M
Lumens	2000-2500LM/M	3000-3400LM/M	3200-3500LM/M
Voltage	24V	24V	24V
Current	0.875A/M	1A/M	1.08A/M
FPC Width	12mm	12mm	12mm
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	2500	3400	3500
4000-4500K	>80	2300	3300	3300
2800-3200K	>80	2100	3100	3200
2600-2800K	>80			
2400-2600K	>80	2000	3000	3200
2200-2400K	>80			

5050 Series

5050 Dual white

120/60/30LEDs/M

White Indoor 120° 24V DC 12V DC 10mm W

80 CRI 90 CRI 95 CRI



Available

IP20 IP65A IP65B IP67A

IP67B IP67C IP68A IP68B

Parameters	120LEDs/M	60LEDs/M	30LEDs/M
Dimension	5000*10*1.8MM	5000*10*1.8MM	5000*10*1.8MM
Cuttable/LEDS	50mm/6LEDS	100mm/6LEDS/24V	166.7mm/5LEDS/24V
		50mm/3LEDS/12V	100mm/3LEDS/12V
Power	19.2W/M	14.4W/M	7.2W/M
Lumens	960LM/M	480LM/M	240LM/M
Voltage	24V	24/12V	24/12V
Current	0.8A/M	0.4A/M/24V	0.24A/M/24V
		0.8A/M/12V	0.4A/M/12V
FPC Width	10mm	10mm	10mm
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	960	480	240
4000-4500K	>80	960	480	240
2800-3200K	>80	960	480	240
2600-2800K	>80			
2400-2600K	>80	840	420	210
2200-2400K	>80			

5050 Series

5050 RGB

120/60/30LEDs/M

RGB Indoor 120° DC DC 10mm W 12mm W



Available

IP20 IP65A IP65B IP67A IP67B IP67C IP68A IP68B

Parameters	120LEDs/M	60LEDs/M	30LEDs/M
Dimension	5000*12*1.8MM	5000*10*1.8MM	5000*10*1.8MM
Cuttable/LEDS	50mm/6LEDS	100mm/6LEDS/24V 50mm/3LEDS/12V	166.7mm/5LEDS/24V 100mm/3LEDS/12V
Power	28.8W/M	14.4W/M	7.2W/M
Lumens	720LM/M	360LM/M	180LM/M
Voltage	24V	24/12V	24/12V
Current	1.2A/M	0.6A/M/24V 1.2A/M/12V	0.36A/M/24V 0.6A/M/12V
FPC Width	12mm	10mm	10mm
IP Grade	IP20	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
RGB		720	360	180

5050 Series

5050 RGBW

96/60LEDs/M

RGBW Indoor 120° DC DC 12mm W 80 CRI 90 CRI



Available

IP20 IP65A IP65B IP67A IP67B IP67C IP68A IP68B

Parameters	96LEDs/M	60LEDs/M
Dimension	5000*12*1.8MM	5000*12*1.8MM
Cuttable/LEDS	62.5mm/6LEDS	100mm/6LEDS
Power	30.7W/M	19.2W/M
Lumens	2280LM/M	1140LM/M
Voltage	24V	24V
Current	1.28A/M	0.8A/M
FPC Width	12mm	12mm
IP Grade	IP20	IP20/65/67

CCT	CRI	Efficiency LM/M	Efficiency LM/M
RGB+6000~6500K	>80	2280	1140
RGB+4000~4500K	>80	2280	1140
RGB+2800~3200K	>80		
RGB+2600~2800K	>80		
RGB+2400~2600K	>80	2280	1140
RGB+2200~2400K	>80		

5050 Series

5050 RGB+W

120 Double line /60 Alternate range LEDs/M

RGBW	Indoor	120°	24V DC	12V DC
80 CRI	90 CRI	95 CRI	12mm W	15mm W



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	120LEDs/M Double line	60LEDs/ Alternate range
Dimension	5000*15*1.8MM	5000*10*1.8MM
Cuttable/LEDS	100mm/12LEDs	166.7mm/10LEDs
Power	28.8W/M	14.4W/M
Lumens	1620LM/M	780LM/M
Voltage	24V	24V
Current	1.2A/M	0.6A/M
FPC Width	15mm	10mm
IP Grade	IP20	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M
RGB+6000~6500K	>80	1620	810
RGB+4000~4500K	>80	1620	810
RGB+2800~3200K	>80	1620	810
RGB+2600~2800K	>80		
RGB+2400~2600K	>80	1500	750
RGB+2200~2400K	>80		

5050 Series

5050 White/Single

120 Double line/60/30LEDs/M

Color	White	Indoor	120°	24V DC	12V DC
80 CRI	90 CRI	95 CRI	10mm W	15mm W	



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B










Parameters	120LEDs/M Double line	60LEDs/M	30LEDs/M
Dimension	5000*15*1.8MM	5000*10*1.8MM	5000*10*1.8MM
Cuttable/LEDS	100mm/6LEDs	100mm/6LEDs/24V	166.7mm/5LEDs/24V
		50mm/3LEDs/12V	100mm/3LEDs/12V
Power	28.8W/M	14.4W/M	7.2W/M
Lumens	2520LM/M	1260LM/M	630LM/M
Voltage	24V	24/12V	24/12V
Current	1.2A/M	0.6A/M/24V	0.3A/M/24V
		1.2A/M/12V	0.6A/M/12V
FPC Width	15mm	10mm	10mm
IP Grade	IP20	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	2520	1260	630
4000-4500K	>80	2520	1260	630
2800-3200K	>80	2520	1260	630
2600-2800K	>80			
2400-2600K	>80	2280	1140	570
2200-2400K	>80			
R618-628nm		360	180	90
G515-525nm		984	482	241
B460-470nm		360	180	90
Y585-595nm		360	180	90

2835 Series

2835 White









240/128/64LEDs/M

 Color	 White	 Indoor	 120°	 24V DC
 80 CRI	 90 CRI	 8mm W	 10mm W	

High efficiency 150-180LM/W



Available

 IP20	 IP65A	 IP65B	 IP67A
 IP67B	 IP67C	 IP68A	 IP68B














Parameters	240LEDs/M	128LEDs/M	64LEDs/M
Dimension	5000*10*1.2MM	5000*10*1.2MM	5000*8*1.2MM
Cuttable/LEDS	33.3mm/8LEDs	62.5mm/8LEDs	125mm/8LEDs
Power	19W/M	10W/M	5W/M
Lumens	3230LM/M	1700LM/M	850LM/M
Voltage	24V	24V	24V
Current	0.8A/M	0.42A/M	0.21A/M
FPC Width	10mm	10mm	8mm
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	3230	1700	850
4000-4500K	>80	3230	1700	850
2800-3200K	>80	2850	1500	750
2600-2800K	>80			
2400-2600K	>80			
2200-2400K	>80			
R618-628nm		648	346	173
G515-525nm		972	518	259
B460-470nm		562	300	150
Y585-595nm		648	346	173

2835 Series









2835 White

480/180/160/120LEDs/M

 Color	 White	 Indoor	 120°	 24V DC	 12V DC
 80 CRI	 90 CRI	 95 CRI	 10mm W	 8mm W	 6mm W
 5mm W					



Available

 IP20	 IP65A	 IP65B	 IP67A
 IP67B	 IP67C	 IP68A	 IP68B

Parameters	480LEDs/M	180LEDs/M	160LEDs/M	120LEDs/M Super Narrow
Dimension	5000*20*1.2MM	5000*10*1.2MM	5000*10*1.2MM	5000*5*1.2MM
Cuttable/LEDS	12.5mm/6LEDs	50mm/9LEDs	50mm/8LEDs	25mm/3LEDs/24V
Power	60W/M	15W/M	20W/M	20W/M
Lumens	6000LM/M	3000LM/M	2300LM/M	1800LM/M
Voltage	24V	24V	24V	24V
Current	2.5A/M	0.625A/M	0.83A/M	0.83A/M
FPC Width	20mm	10mm	10mm	5mm
IP Grade	IP20/65/67	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	6000	3000	2300	1800
4000-4500K	>80	5800	2800	2200	1600
2800-3200K	>80	5500	2600	2000	1500
2600-2800K	>80				
2400-2600K	>80				
2200-2400K	>80				
R618-628nm		480	490	360	360
G515-525nm		720	735	540	540
B460-470nm		416	425	312	312
Y585-595nm		480	490	360	360

2835 Series

2835 White

72/60LEDs/M

				24V DC
80 CRI	90 CRI	95 CRI	6mm W	

Zigzag Series



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B

Parameters	72LEDs/M	60LEDs/M
Dimension	5000*6*1.2MM	5000*6*1.2MM
Cuttable/LEDS	83.3mm/6LEDs/24V	100mm/6LEDs/24V
	41.7mm/3LEDs/12V	50mm/3LEDs/12V
Power	14.4W/M	11W/M
Lumens	1270LM/M	1058LM/M
Voltage	24/12V	24/12V
Current	0.55A/M/24V	0.46A/M/24V
	1.1A/M/12V	0.92A/M/12V
FPC Width	6mm	6mm
IP Grade	IP20	IP20

CCT	CRI	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1270	1058
4000-4500K	>80	1270	1058
2800-3200K	>80	1160	966
2600-2800K	>80		
2400-2600K	>80		
2200-2400K	>80		
R618-628nm		432	360
G515-525nm		648	540
B460-470nm		374	312
Y585-595nm		432	360

3528 Series

3528 White

240Double row/240Single row/120/60LEDs/M

				24V DC	12V DC
80 CRI	90 CRI	95 CRI	10mm W	8mm W	6mm W
5mm W					



Available

IP20	IP65A	IP65B	IP67A
IP67B	IP67C	IP68A	IP68B


Parameters	240LEDs/M Double row	240LEDs/M Single row	120LEDs/M	60LEDs/M
Dimension	5000*15*2MM	5000*10*2MM	5000*8*2MM	5000*8*2MM
Cuttable/LEDS	50mm/6LEDs/24V	50mm/6LEDs	50mm/6LEDs/24V	50mm/6LEDs/24V
	25mm/3LEDs/12V		25mm/3LEDs/12V	25mm/3LEDs/12V
Power	19.2W/M	19.2W/M	9.6W/M	4.8W/M
Lumens	1680LM/M	1680LM/M	840LM/M	420LM/M
Voltage	24/12V	24V	24/12V	24/12V
Current	0.8A/M/24V	0.8A/M	0.4A/M/24V	0.2A/M/24V
	1.6A/M/12V		0.8A/M/12V	0.4A/M/12V
FPC Width	15mm	10mm	8mm	8mm
IP Grade	IP20	IP20/65/67	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1680	1680	840	420
4000-4500K	>80	1680	1680	840	420
2800-3200K	>80	1440	1440	720	360
2600-2800K	>80				
2400-2600K	>80				
2200-2400K	>80				
R618-628nm		528	528	264	132
G515-525nm		792	792	396	198
B460-470nm		360	360	180	90
Y585-595nm		528	528	264	132

3528 Series

3528R+G+B


120/60LEDs/M



Color led alternate



Available

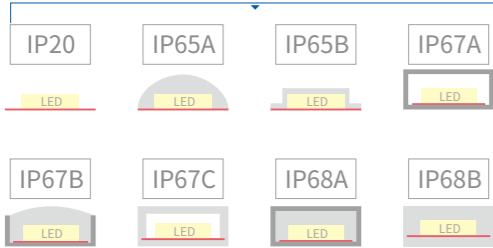


Parameters	120LEDs/M	60LEDs/M
Dimension	5000*8*2MM	5000*8*2MM
Cuttable/LEDS	75mm/9LEDS+50mm/6LEDS	150mm/9LEDS+100mm/6LEDS
Power	11.5W/M	5.8W/M
Lumens	280LM/M	140LM/M
Voltage	12V	12V
Current	0.96A/M	0.48A/M
FPC Width	8mm	8mm
IP Grade	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M
R+G+B		280	140

3528 Series

3528RGB


30/20/18LEDs/M



5V



Available

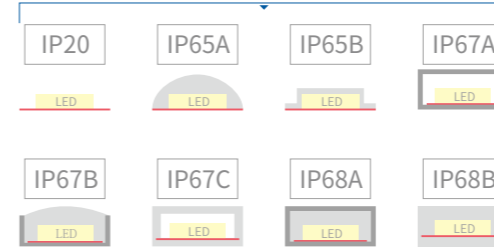

3528RGB with small size,so it mixed better
3528RGB 5V always been used as TV back lighting
Atmosphere lighting etc.











Parameters	30LEDs/M	20LEDs/M	18LEDs/M
Dimension	3000*8*2MM	3000*8*2MM	3000*8*2MM
Cuttable/LEDS	33.3mm/1LEDS	50mm/1LEDS	55.5mm/1LEDS
Power	4.8W/M	4.8W/M	4.8W/M
Lumens	136LM/M	136LM/M	136LM/M
Voltage	5V	5V	5V
Current	0.96A/M	0.96A/M	0.96A/M
FPC Width	8mm	8mm	8mm
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
RGB		136	136	136

5630 Series







5630 White

126/90/72/60LEDs/M

 Color	 White	 Indoor	 120°	 24V DC
 80 CRI	 90 CRI	 95 CRI	 12mm W	 10mm W



Available

 IP20	 IP65A	 IP65B	 IP67A
 IP67B	 IP67C	 IP68A	 IP68B

Parameters	126LEDs/M	90LEDs/M	72LEDs/M	60LEDs/M
Dimension	5000*12*1MM	5000*10*1MM	5000*10*1MM	5000*10*1MM
Cutable/LEDS	55.5mm/7LEDS	55.5mm/5LEDS	83.3mm/6LEDS	100mm/6LEDS
Power	24W/M	19.6W/M	20W/M	20W/M
Lumens	3150LM/M	1980LM/M	2160LM/M	2100LM/M
Voltage	24V	24V	24V	24V
Current	1A/M	0.82A/M	0.84A/M	0.83A/M
FPC Width	12mm	10mm	10mm	10mm
IP Grade	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68	IP20/65/67/68

CCT	CRI	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M	Efficiency LM/M
6000-6500K	>80	1680	1680	840	420
4000-4500K	>80	1680	1680	840	420
2800-3200K	>80				
2600-2800K	>80	1440	1440	720	360
2400-2600K	>80				
2200-2400K	>80				
R 618-628nm		887	514	638	631
G 515-525nm		793	416	571	564
B 460-470nm		700	409	630	498
Y 585-595nm		887	518	638	631

Linear light Series

2835 White

114LEDs/M

Color White Indoor 120° 24V DC 80 CRI

20mm W



Combination

Black Cover White

Parameters	114LEDs/M
Dimension	1200*20*20MM
Power	18W/PCS
Lumens	150-180LM/Watt
Voltage	24V
Cover	Microprismatic cover
IP Grade	Ip40

CCT	CRI	Efficiency LM/M
6000-6500K	>80	3000
4000-4500K	>80	3000
2800-3200K	>80	
2600-2800K	>80	3700
2400-2600K	>80	
2200-2400K	>80	
R 618-628nm	/	/
G 515-525nm	/	/
B 460-470nm	/	/
Y 585-595nm	/	/

Linear light Series

2835 White

114LEDs/M

Color White Indoor 120° 24V DC 80 CRI

17.5mm W













Combination

Plug Cover White











Parameters	114LEDs/M
Dimension	1200*17.5*16MM
Power	15W/PCS
Lumens	150-180LM/Watt
Voltage	24V
Cover	Milky cover
IP Grade	Ip40

CCT	CRI	Efficiency LM/M
6000-6500K	>80	3000
4000-4500K	>80	3000
2800-3200K	>80	
2600-2800K	>80	3700
2400-2600K	>80	
2200-2400K	>80	
R 618-628nm	/	/
G 515-525nm	/	/
B 460-470nm	/	/
Y 585-595nm	/	/

Strip accessories-Profiles-3

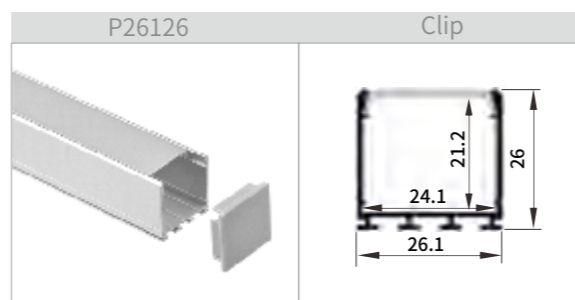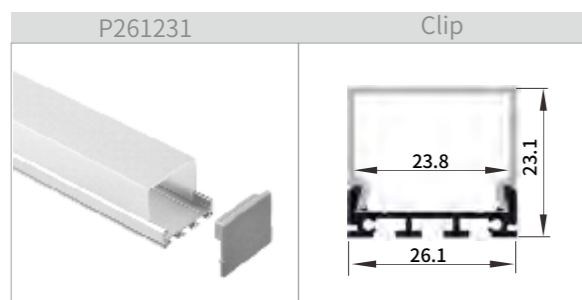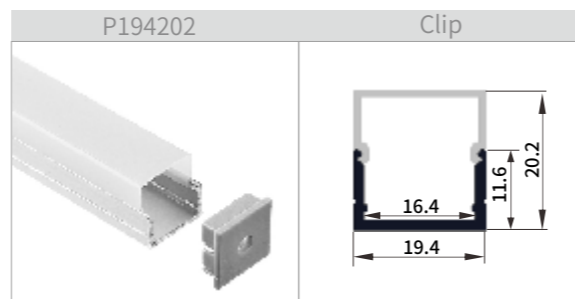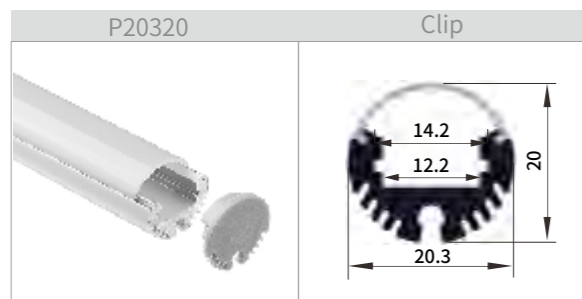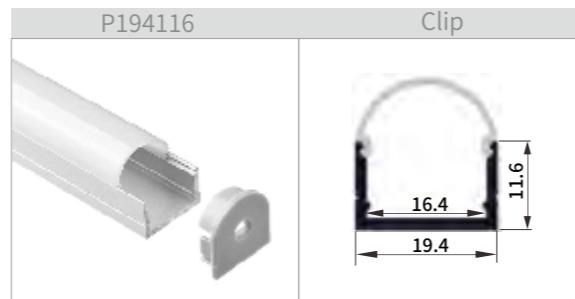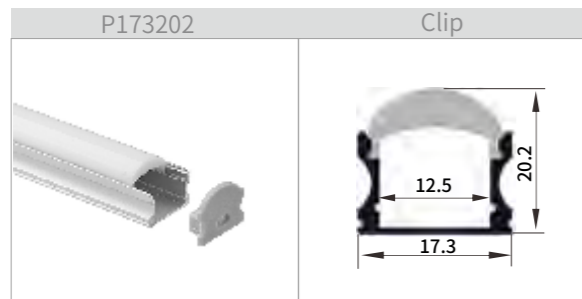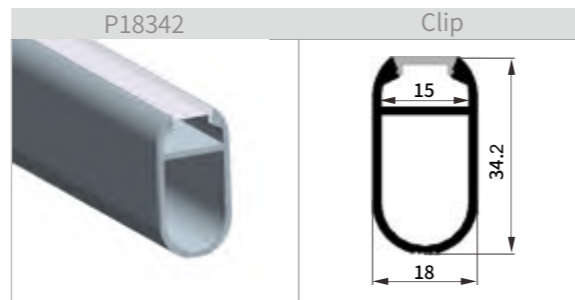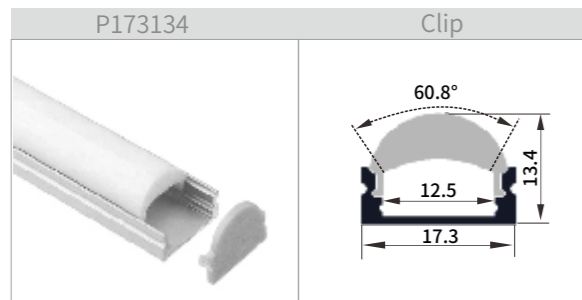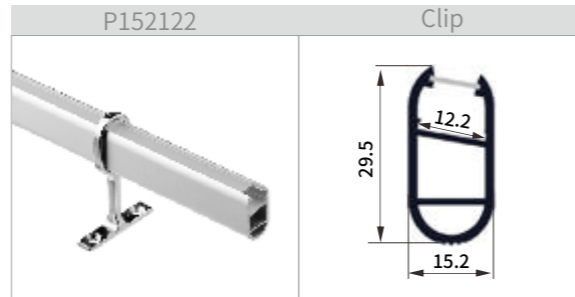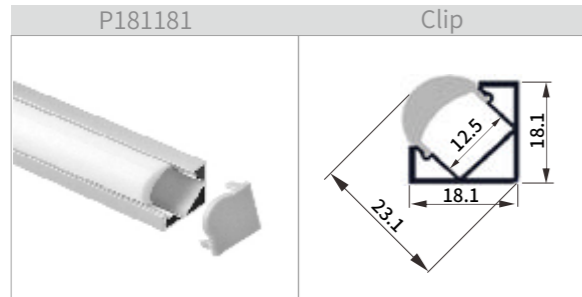

Strip accessories-Profiles-4

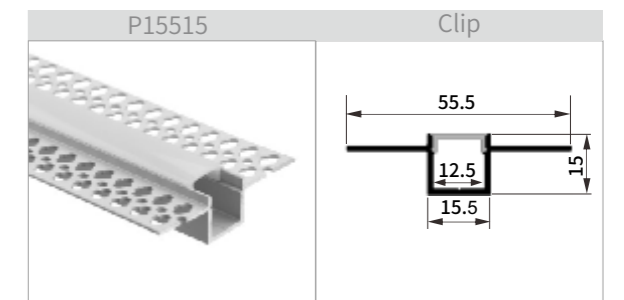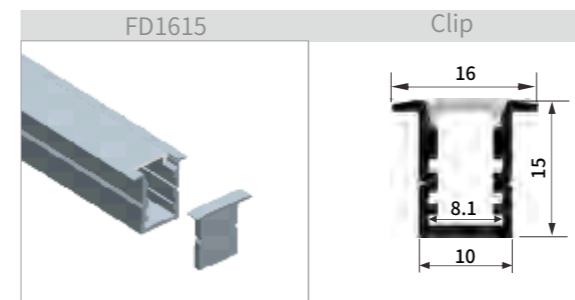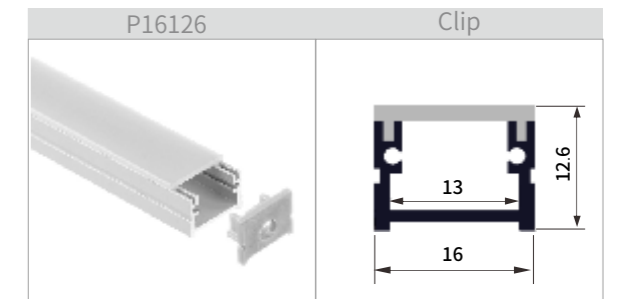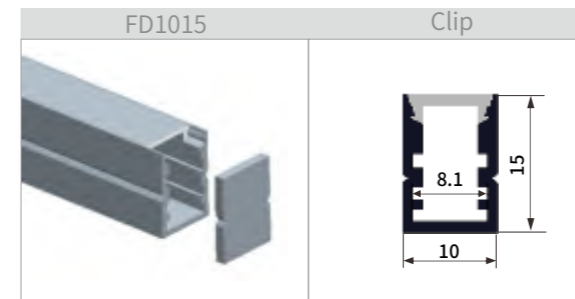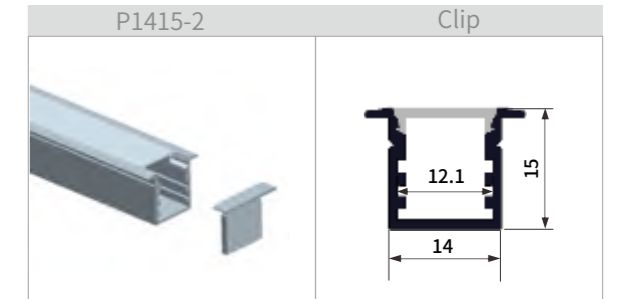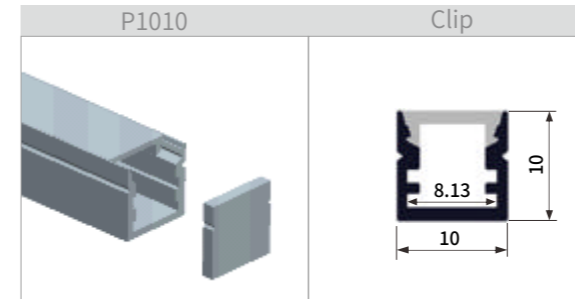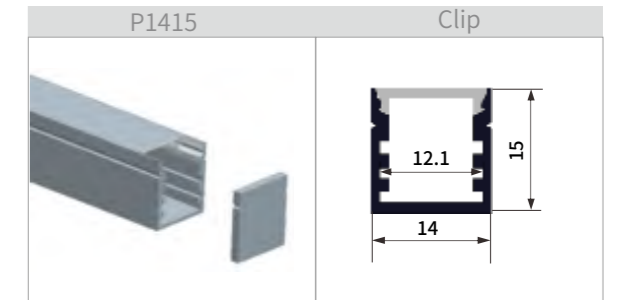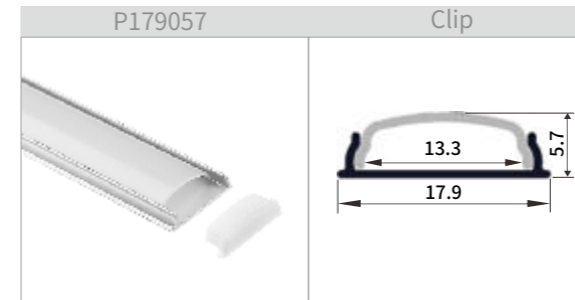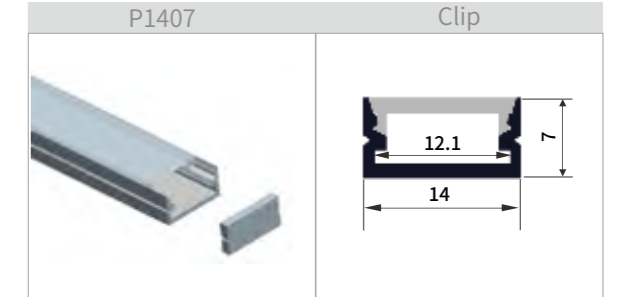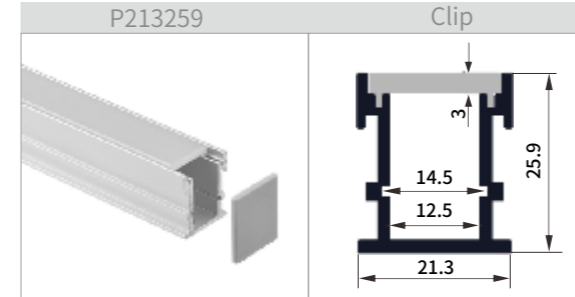

Power connector



Power cord connector



Fast connector

